

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/537198



(43) International Publication Date
28 October 2004 (28.10.2004)

PCT

(10) International Publication Number
WO 2004/092008 A1

- (51) International Patent Classification⁷: B63H 5/14
- (21) International Application Number:
PCT/CA2004/000163
- (22) International Filing Date: 6 February 2004 (06.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2,425,430 17 April 2003 (17.04.2003) CA
- (71) Applicant and
(72) Inventor: YANG, Shi, Heng [CN/CA]; 4606 Ross Street,
Vancouver, British Columbia V5V 4T9 (CA).

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

Declarations under Rule 4.17:

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation CA

[Continued on next page]

- (54) Title: A FRONT-MOUNTED WATER-SEPARATION PROPELLER

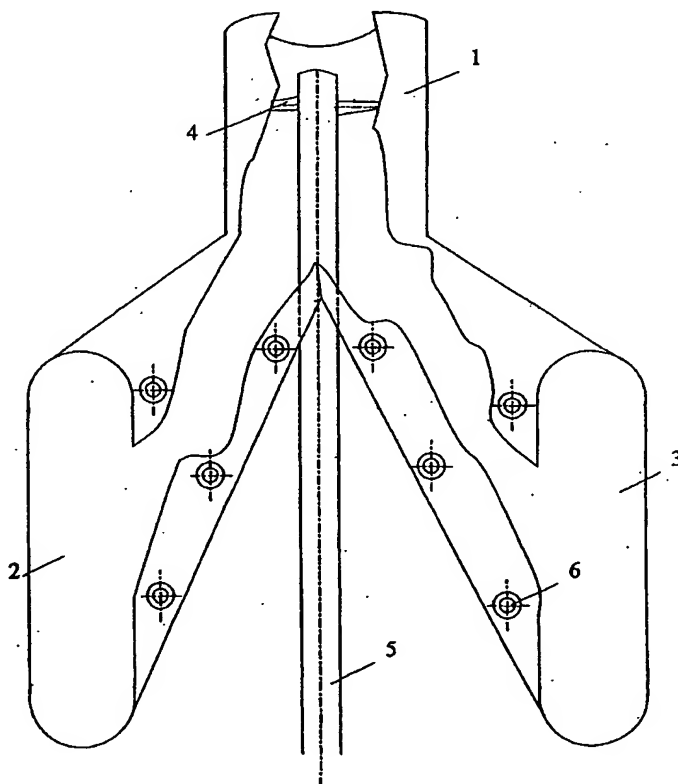

Diagram

- (57) Abstract: Based on the law of dynamic water-separation, in this invention, a new type of front-mounted booster water-separation propeller has been designed to raise a vessel's speed by reducing resistance from water and increasing the advance force. It's composed of two parts, of which the external includes an influent tube (1), a left thin, flat gushing gutter (2), a right thin, flat gushing gutter (3), and screwed connections (6), of which interior includes a booster (4) and its axle (5). Both parts can be changed independently.

WO 2004/092008 A1